

VERIFICATION OF TRANSLATION

I, Wakako Anzai, of c/o SAKAI International Patent Office, 2-5, Kasumigaseki 3-chome, Chiyoda-ku, Tokyo 100-6020 Japan, hereby declare that I am a translator of the document attached, and attached document is a true and correct translation made by me to the best of my knowledge and belief.

Japanese Patent Application No.2002-268573, filed on September 13, 2002

Signature of Translator: _____



Wakako Anzai

Date : October 2, 2008

(TRANSLATION)

PATENT OFFICE
JAPANESE GOVERNMENT

This is to certify that the annexed is a true copy of the following application as filed with this Office.

DATE OF APPLICATION : September 13, 2002

APPLICATION NUMBER : Japanese Patent Application
No. 2002-268573

APPLICANT(S) : MITSUI MINING & SMELTING CO., LTD

Issued :

Commissioner,
Patent Office

(Official Seal)

Certificate No.

[NAME OF DOCUMENT] APPLICATION FOR PATENT

[REFERENCE NO.] PMKA-14257

[FILING DATE] September 13, 2002

[ADDRESS TO] COMMISSIONER, PATENT OFFICE

[INTL' CLASSIFICATION] E05B 65/19

[INVENTOR]

[ADDRESS] c/o NIRASAKI Plant,
Mitsui Mining & Smelting CO., LTD.
1200, Shimojo-Nishiwari, Okusa-cho Nirasaki-shi
Yamanashi, Japan

[NAME] Makoto HIRAI

[INVENTOR]

[ADDRESS] c/o NIRASAKI Plant,
Mitsui Mining & Smelting CO., LTD.
1200, Shimojo-Nishiwari, Okusa-cho Nirasaki-shi
Yamanashi, Japan

[NAME] Tsuguo HOSHIKAWA

[APPLICANT FOR PATENT]

[CODE] 000006183

[NAME] Mitsui Mining & Smelting CO., LTD.

[AGENT]

[CODE NO.] 100089118

[PATENT ATTORNEY]

[NAME] Hiroaki SAKAI

[INDICATION OF FEE]

[KIND] DEPOSITED

[NUMBER] 036711

[AMOUNT OF FEE] 21000

[LIST OF ATTACHED DOCUMENTS]

[ITEM] SPECIFICATION 1

[ITEM] DRAWINGS 1

[ITEM] ABSTRACT 1

[NUMBER] 0109108

[Type of Document] Specification

[Title of the Invention] Driving apparatus and door closer

[Scope of Claims for Patent]

[Claim 1] A driving apparatus for driving an assisting
5 mechanism serving as an assistant for opening operation or closing
operation of a door, the driving apparatus comprising:

a plurality of driving sources;

a plurality of driving gears that is individually provided at the
driving sources; and

10 a driven gear that is engaged with each of the driving gears,
wherein

the assisting mechanism is activated through rotation of the
driven gear by driving of the driving sources.

[Claim 2] A door closer comprising:

15 a striker that is provided on one of a body and a door of a
vehicle in such a manner that the striker is engageable with a latch
provided on other of the body and the door of the vehicle;

an assisting mechanism that pulls in the striker in a state of
engagement with the latch to close the door; and

20 a driving apparatus that drives the assisting mechanism,
wherein

the driving apparatus includes

a plurality of driving sources;

a plurality of driving gears that is individually provided at

25 the driving sources; and

a driven gear that is engaged with each of the driving gears, and

the assisting mechanism is activated through rotation of the driven gear by driving of the driving sources.

5 [Claim 3] The door closer according to claim 2, further comprising a switching unit that is provided between the driving sources and a power source that supplies a current to the driving sources to switch a current flow to the driving sources on and off, wherein

when the striker drawn in through the rotation of the driven gear
10 has reached a predetermined drawing-in termination position, the switching unit cuts off the current flow to the driving sources to stop driving of the driving sources.

[Detailed Description of the Invention]

[0001]

15 [Field of the Invention]

The present invention relates to a driving apparatus and a door closer.

[0002]

[Prior Art]

20 In an ordinary vehicle, for closing a door such as a trunk lid, for example, a latch is provided on the trunk lid, while a striker is provided on a body of the vehicle, so that the door is closed such that the latch and the striker are engaged with each other.

[0003]

25 In the vehicle, for example, when the trunk lid is closed, the

trunk lid must be pushed toward the body, while a weather strip provided on the body of the vehicle is being deformed elastically, that results in increase of a force required for closing the trunk lid.

Accordingly, when the trunk lid is closed, it must be forcibly pushed

5 down. Since vibrations at a closing time of the door become large, a rear seat passenger or vehicle occupant may feel uncomfortable. In view of these circumstances, especially, in some of high class vehicles, a door closer provided with a door-closing assisting mechanism that pulls in a striker engaged with a latch and a driving apparatus that
10 actuates the door-closing assisting mechanism. The driving apparatus is usually provided with a driving motor (a driving source), a worm (a driving gear) provided on a rotational shaft of the driving motor, and a worm wheel (a driven gear) that is engaged with the worm (see, for example, Patent Literature 1).

15 [0004]

In a vehicle on which the door closer is mounted, since a trunk lid can be closed by a rotation of the worm wheel performed by driving of the driving motor, vibrations due to forcible pushing-down of the trunk lid at a closing time of the trunk lid are not generated.

20 [0005]

Patent Literature 1

Japanese Registered Utility Model Publication No. 2562770

(pages 2 to 4, Fig. 6)

[0006]

25 [Problems to be Solved by the Invention]

As described above, since a large force is required to close the trunk lid, a large-sized driving motor generating large power is used as the driving motor in the driving apparatus.

[0007]

5 Therefore, since power transmitted from the driving motor to the worm wheel through the worm inevitably becomes large, a large-sized worm wheel is required for securing a sufficient strength as the worm wheel, which results in over-sizing of the driving apparatus and a door closer including the driving apparatus.

10 [0008]

In view of the above problems, an object of the present invention is to provide a driving apparatus and a door closer that allow downsizing.

[0009]

15 [Means to Solve the Problems]

In order to achieve the objectives above, according to claim 1 of the present invention, a driving apparatus for driving an assisting mechanism serving as an assistant for opening operation or closing operation of a door, the driving apparatus comprising a plurality of driving sources; a plurality of driving gears that is individually provided at the driving sources; and a driven gear that is engaged with each of the driving gears, wherein the assisting mechanism is activated through rotation of the driven gear by driving of the driving sources.

20

[0010]

25 Further, according to claim 2 of the present invention, a door

closer comprising a striker that is provided on one of a body and a door of a vehicle in such a manner that the striker is engageable with a latch provided on other of the body and the door of the vehicle; an assisting mechanism that pulls in the striker in a state of engagement with the latch to close the door; and a driving apparatus that drives the assisting mechanism, wherein the driving apparatus includes a plurality of driving sources; a plurality of driving gears that is individually provided at the driving sources; and a driven gear that is engaged with each of the driving gears, and the assisting mechanism is activated through rotation of the driven gear by driving of the driving sources.

[0011]

Furthermore, according to claim 3 of the present invention, the door closer according to claim 2, further comprising a switching unit that is provided between the driving sources and a power source that supplies a current to the driving sources to switch a current flow to the driving sources on and off, wherein when the striker drawn in through the rotation of the driven gear has reached a predetermined drawing-in termination position, the switching unit cuts off the current flow to the driving sources to stop driving of the driving sources.

[0012]

[Embodiments of the Invention]

Exemplary embodiments of a driving apparatus and a door closer according to the present invention will be explained below in detail with reference to the accompanying drawings.

[0013]

Fig. 1 depicts a door closer 100 according to this embodiment. The door closer 100 shown in Fig.1 closes a trunk lid (a door) of a vehicle (not shown) and it is provided on a body (not shown) of the vehicle.

5 [0014]

The door closer 100 includes a striker ST, a closer mechanism (an assisting mechanism for door closing) 20, and a closer driving unit (a driving apparatus) 30. The door closer 100 causes the closer driving unit 30 to actuate the closer mechanism 20 to drawl in the
10 striker ST in engagement with a latch 12 described later (indicated by a double dotted line in Fig. 1), thereby closing the trunk lid. Incidentally, in the following explanation, a state where the striker ST has been drawn-in is called "a drawn-in state" and a state where the striker ST has been pushed up is called "a returned state".

15 [0015]

As shown in Fig. 2, a trunk latch 10 includes a latch 12, a ratchet 13, a latch spring 14, an output lever 15, a wire 16, and a latch switch (a detector) 17 inside a trunk latch main unit 11, and it is provided on the trunk lid of the vehicle (not shown).

20 [0016]

The trunk latch main unit 11 has an inverse U-shaped striker guiding groove 11a formed to open a lower face thereof for guiding the striker ST.

[0017]

25 The latch 12 is engaged with the striker ST guided to the trunk

latch main unit 11, and it is rotatable about a shaft member 12a provided on the trunk latch main unit 11. The latch 12 has a hook portion 12b, a latch contacting portion 12c, and an output unit 12d.

[0018]

5 In Fig. 2, the hook portion 12b is constituted in a hook shape at a portion provided to extend below the shaft member 12a. In an orientation which the latch 12 has been rotated in a counterclockwise direction, as shown in Fig. 2, the hook portion 12b reaches a state where it has advanced to the striker guiding groove 11a (an advanced
10 state). On the other hand, in an orientation which the latch 12 has been rotated in a clockwise direction, as shown in Fig. 3, the hook portion 12b reaches a state where it has retracted from the striker guiding groove 11a (a retracted state).

[0019]

15 The latch contacting portion 12c is formed at a distal end of the latch extending rightward of the shaft member 12a in a stepped manner in Fig. 2. The output unit 12d is constituted at a portion of the latch extending obliquely leftward of the shaft member 12a in Fig. 2.

[0020]

20 In Fig. 2, the ratchet 13 is rotatably supported at its distal end by a shaft member 13a and the other end thereof extends upwardly. In Fig. 2, the shaft member 13a is provided at a portion positioned downwardly rightward of the shaft member 12a of the latch 12 in the trunk latch main unit 11. The ratchet 13 is provided at an
25 approximately central portion thereof with a ratchet contacting portion

13b forming a step, while being provided at an extended end portion thereof with an input unit 13c formed in a bent manner.

[0021]

The latch spring 14 is constituted of an extension coil spring,
5 and one end thereof is engaged with latch 12, while the other end thereof is engaged with the ratchet 13. The latch spring 14 urges the latch 12 in a clockwise direction by its own resilient restoring force, while urging the ratchet 13 in a counterclockwise direction.

[0022]

10 In Fig. 2, the output lever 15 is rotatably supported by a shaft member 15a provided at a portion of the trunk latch main unit 11 positioned above the shaft member 12a of the latch 12 described above. In Fig. 2, the output lever 15 has a long side portion extending rightward of the shaft member 15a, while it has a short side portion
15 extending downward of the shaft member 15a so as to be orthogonal to the long side portion. The output lever 15 is constituted with an output unit 15b at an extending distal end of the short side portion. The output unit 15b is arranged to be capable of pressing the input unit 13c of the ratchet 13, when the output lever 15 rotates in a
20 counterclockwise direction.

[0023]

When an external actuator (not shown) is actuated, the wire 16 transmits a driving force of the actuator to the output lever 15 to rotate the output lever 15 in a counterclockwise direction in Fig. 2.

25 [0024]

The latch switch 17 detects whether the hook portion 12b is in the advance state or the retracted state, and it has a push button 17a, a hinge lever portion 17b, and an output cable 17c. The latch switch 17 is arranged such that the push button 17a is pushed by the output unit 12d via the hinge lever portion 17b (exemplified in Fig. 3) in the retracted state of the hook portion 12b of the latch 12 so that the latch switch 17 is turned ON, while the push button 17a is restored (exemplified in Fig. 2) in the advanced state of the hook portion 12b of the latch 12 so that the latch switch 17 is turned OFF. An ON/OFF signal of the latch switch 17 is transmitted to a relay controller 111 described later via the output cable 17c.

[0025]

As described above, in the trunk latch 10, when trunk lid is pushed down in the retracted state of the hook portion 12b of the latch 12 shown in Fig. 3, the latch 12 is pushed by the striker ST guided by the striker guiding groove 11a to rotate in a counterclockwise direction. Thereby, the hook portion 12b of the latch 12 advances toward the striker guiding groove 11a so as to cover a lower portion of the striker ST. When the hook portion 12b reaches the advanced state shown in Fig. 2, the latch 12 and the striker ST are engaged with each other. At this time, the latch contacting portion 12c and the ratchet contacting portion 13b abut on each other, and the abutting state thereof is held by an urging force of the latch spring 14, so that the engaging state of the hook portion 12b and the striker ST with each other is also held.

[0026]

On the other hand, in the advanced state of the hook portion 12b shown in Fig. 2, that is, in a state where the hook portion 12b and the striker ST are held in the engaging state thereof, when the external actuator (not shown) is actuated, as shown in Fig. 3, the output lever 15 is rotationally driven in a counterclockwise direction via the wire 16. When the output lever 15 is rotated in the counterclockwise direction, the output unit 15b presses the input unit 13c to rotate the ratchet 13 in a clockwise direction, so that the abutting state of the latch contacting portion 12c and the ratchet contacting portion 13b is released. Thereby, since the latch 12 is rotated by an urging force of the latch spring 14 in a clockwise direction, the hook portion 12b reaches the retracted state so as to separate from the striker ST, and the engaging state of the hook portion 12b and the striker ST is released.

[0027]

On the other hand, the closer mechanism unit 20 is driven by the closer driving unit 30 to draw the striker ST (a drawing-in operation) or push up the striker ST (a returning operation). The closer mechanism unit 20 has a housing 21, a rotary plate 22, and a striker retaining plate 23.

[0028]

The rotary plate 22 is rotatable about a shaft member 22a provided on a housing 21, and it is constituted with a driven gear 22b at a distal end of a portion of the rotary plate 22 extending obliquely and downwardly rightward of the shaft member 22a in Fig. 1. The driven gear 22b is rotationally driven by the closer driving unit 30 via a driving

gear 36a described later to rotate the rotary plate 22 in a clockwise direction and a counterclockwise direction in Fig. 1.

[0029]

The rotary plate 22 has a pin groove 22c formed in an elongated
5 hole extending in a vertical direction, a fixed pin 22d provided at a
portion of the rotary plate positioned below the pin groove 22c, a
movable pin 22e moving to approach to and separate from the fixed pin
22d while guided by the pin groove 22c, and a pin restraining spring 22f
connecting the fixed pin 22d and the movable pin 22e in Fig. 1. The
10 pin restraining spring 22f is constituted of an extension coil spring, and
one end thereof is engaged with the movable pin 22e and the other end
thereof is engaged with the fixed pin 22d. The pin restraining spring
22f urges the movable pin 22e toward the fixed pin 22d.

[0030]

15 A striker holding plate 23 is supported at its proximal end by the
shaft member 22a described above to be rotatable about the shaft
member 22a. In Fig. 1, the striker holding plate 23 has the striker ST
at a distal end of a portion thereof extending leftward of the shaft
member 22a, while has an opening 23a at a portion thereof extending
20 downward of the shaft member 22a.

[0031]

The striker ST in this embodiment is applied with a constitution
that a circular plate STa is provided at a distal end of a main unit
constituting a rod with a circular portion.

25 [0032]

The opening 23a is provided at a position through which the movable pin 22e of the rotary plate 22 is inserted, and it has a main engaging recess 23aa and a sub-engaging recess 23ab constituted to be engageable with the movable pin 22e inserted.

5 [0033]

The closer driving unit 30 functions as a driving apparatus actuating the closer mechanism 20 described above. As shown in Fig. 4, the closer driving unit 30 is constituted to have two driving motors (a driving source) 32u, 32b, a worm wheel (a driven gear) 34, a driving gear 34a, an idle gear 35, a driving gear 35a, an output gear 36, a driving gear 36a, a target disc 36b, a drawing-in switch (a switching unit) 37, and a returning switch 38 inside a closer driving unit main unit 31.

[0034]

15 The output gear 36 is coaxially provided with the driving gear 36a and the target disc 36b. The driving gear 36a drives the driven gear 22b of the rotary plate 22 and it is rotated integrally with the output gear 36.

[0035]

20 The target disc 36b is a disc member having a returning termination detecting groove 36ba and a drawing-in termination detecting groove 36bb on an outer periphery, and it is rotated integrally with the driving gear 36a. The returning termination detecting groove 36ba and drawing-in termination detecting groove 36bb are arranged so
25 as to separate from each other in an axial direction of the target disc

36b.

[0036]

The returning switch 37 has a push button 37a and is constituted to allow detection of the position of the rotary plate 22 through the target disc 36b for terminating a returning action. The returning switch 37 is arranged such that the push button 37a is protruded into the returning termination detecting groove 36ba in the returned state of the striker ST (exemplified in Fig. 5(b)), while the push button 37a is pushed in by the target disc 36b in the drawn-in state of the striker ST (exemplified in Fig. 5(a)). The returning switch 37 is provided with an A terminal, a B terminal, and an E terminal as externally connecting terminals. The returning switch 37 is constituted such that, the B terminal is connected to the E terminal in a state that the push button 37a has protruded to the returning termination detecting groove 36ba, while the A terminal is connected to the E terminal in a state that the push button 37a is being pushed in by the target disc 36b.

[0037]

The drawing-in switch 38 has a push button 38a and is constituted to allow detection of the position of the rotary plate 22 through the target disc 36b for terminating a drawing-in action. The drawing-in switch 38 is arranged such that the push button 38a is protruded into the drawing-in termination detecting groove 36bb in the drawn-in state of the striker ST (exemplified in Fig. 5(a)), while the push button 38a is pushed in by the target disc 36b in the returned state of

the striker ST (exemplified in Fig. 5(b)). The drawing-in switch 38 is provided with a C terminal, a D terminal, and an F terminal as externally connecting terminals. The drawing-in switch 38 is constituted such that, the C terminal is connected to the F terminal in a state that the
5 push button 38a has protruded to the drawing-in termination detecting groove 36bb, while the D terminal is connected to the F terminal in a state that the push button 37a has been pushed in by the target disc 36b.

[0038]

10 The idle gear 35 is coaxially provided with the driving gear 35a. The driving gear 35a rotationally drives the output gear 36 described above, and it is rotated integrally with the idle gear 35.

[0039]

The worm wheel 34 is coaxially provided with the driving gear
15 34a. The driving gear 34a rotationally drives the idle gear 35, and it is rotated integrally with the worm wheel 34.

[0040]

The driving motor 32u is provided with a worm 33u at a motor shaft 32au that is a rotating shaft thereof. The driving motor 32b is
20 provided with a worm 33b at a motor shaft 32ab that is a rotating shaft thereof. In Fig. 4, the worm 33u of these two worm (driving gears) 33u and 33b is arranged so as to engaged with an upper portion of the worm wheel 34, while the worm 33b is arranged so as to be engaged with a lower portion of the worm wheel 34.

25 [0041]

Fig. 6 depicts a connecting circuit of the driving motors 32u and 32b, the returning switch 37, and the drawing-in switch 38 in the door closer 100 described above, and a control base board 110 provided externally of the door closer 100.

5 [0042]

In the door closer 100, the driving motors 32u and 32b are connected in parallel, and the returning switch 37 and the drawing-in switch 38 are connected in series with the driving motors 32u and 32b connected in parallel.

10 [0043]

In the returning switch 37, the driving motors 32u and 32b are connected to the E terminal, and the E terminal is selectively connected with either one of the A terminal and the B terminal. The A terminal is connected to a power cable 101, while the B terminal is connected to
15 the ground.

[0044]

In the drawing-in switch 38, the driving motors 32u and 32b are connected to the F terminal, and the F terminal is selectively connected with either one of the C terminal and the D terminal. The D terminal is
20 connected to a power cable 102, while the C terminal is connected to the ground.

[0045]

The control base board 110 has a relay R1, a relay R2, a power source V1, a power source V2, and a relay controller 111.

25 [0046]

The relay R1 is connected to the A terminal of the returning switch 37 via the power cable 101, and it is for selectively connecting either one of a terminal indicated with a sign + (hereinafter, "a plus terminal") and a terminal indicated with a sign - (hereinafter, "a minus terminal") to the A terminal. The plus terminal is connected to the power source V1, while the minus terminal is connected to the ground.

[0047]

The relay R2 is connected to the D terminal of the drawing-in switch 38 via the power cable 102, and it is for selectively connecting either one of the plus terminal and the minus terminal to the D terminal. The plus terminal is connected to the power V2, while the minus terminal is connected to the ground.

[0048]

The relay controller 111 is constituted to be capable of acquiring an ON/OFF signal from the latch switch 17 and transmitting a control signal to the relay R1 and the relay R2. The relay controller 111 acquires an ON/OFF signal of the latch switch 17 via the output cable 17c to control a connecting state of the relay R1 and a connecting state of the relay R2 in response to the ON/OFF signal acquired so as to meet a drawing-in action condition described later. The relay controller 111 has a function for acquiring a door opening signal externally, and it controls a connecting state of the relay R1 and a connecting state of the relay R2 so as to meet a returning action condition described later, when acquiring a door opening signal.

[0049]

Fig. 7 and Fig. 8 depict a relationship between an operation mode of the door closer 100 in the door closer described above, and a connecting state of the returning switch 37 and a connecting state of the drawing-in switch 38.

5 [0050]

An operation from the door opened state to closing the trunk lid will be explained first, assuming that the returned state of the striker ST and the retracted state of the hook portion 12b, namely, a state where the striker ST is not in engagement with the latch 12 and the trunk lid
10 has been opened. In the retracted state of the hook portion 12b, when the trunk latch 10 is pushed down, the hook portion 12b and the striker ST are engaged with each other, and the engaging state is maintained. At this time, the output unit 12d pushes the push button 17a of the latch switch 17 to switch the latch switch 17 from an OFF state to an ON
15 state, so that an ON signal of the latch switch 17 is acquired by the relay controller 111 via the output cable 17c. The relay controller 111 that has acquired the ON signal controls the relay R1 and the relay R2 so as to meet the drawing-in action condition, specifically, the condition for the connecting state of the minus terminal in the relay R1 and the
20 connecting state of the plus terminal in the relay R2.

[0051]

When the relay R1 and the relay R2 are controlled so as to meet the drawing-in action condition, a voltage of the power source V2 is applied between the A terminal of the returning switch 37 and the D
25 terminal of the drawing-in switch 38. At this time, in the returning state

(exemplified in Fig. 5(b)), the drawing-in switch 38 is in a state that the D terminal is put in a connected state because the push button 38a has been pushed in by the target disc 36b, while the returning switch 37 is in a state that the B terminal is put in a connected state because the push button 37a has protruded toward the returning termination detecting groove 36ba. Thereby, since the driving motors 32u and 32b and the power source V2 are connected to each other, current i_2 from the power source V2 is supplied to the driving motors 32u and 32b via the drawing-in switch 38. Thereby, the driving motors 32u and 32b generates powers so that the powers generated by the driving motors 32u and 32b are transmitted to the worm wheel 34 via the worms 33u and 33b. After the power transmitted to the worm wheel 34 are sequentially transmitted through the driving gear 34a, the idle gear 35, the driving gear 35a, the output gear 36, and the driving gear 36a, it rotates the rotary plate 22 through the driven gear 22b in a counterclockwise direction in Fig. 1. At this time, as shown in Fig. 1, since the movable pin 22e and the main engaging recess 23aa are in engagement with each other, the striker holding plate 23 rotates integrally with the rotary plate 22 in a counterclockwise direction, thereby pulling down the striker ST (a drawing-in operation) as indicated by a double dotted chain line.

[0052]

In this embodiment, in Fig. 1, when the striker holding plate 23 is rotated in a counterclockwise direction, while the movable pin 22e is being moved to separate from the fixed pin 22d against an urging force

of the pin restraining spring 22f in the rotary plate 22, the movable pin 22e can be caused to engage the sub-engaging recess 23ab.

Accordingly, even when the striker ST is in a returned state, the striker ST can be switched to in a drawn-in state by causing the movable pin
5 22e and the sub-engaging recess 23ab to engage each other to rotate the striker holding plate 23 in a counterclockwise direction.

[0053]

Just after the drawing-in action starts, the push button 37a protruding toward the returning termination detecting groove 36ba
10 (exemplified in Fig. 5(b)) is pushed in by the target disc 36b according to rotation of the target disc 36b in a clockwise direction due to the drawing-in action. Thereby, in the returning switch 37, instead of the B terminal, the A terminal is switched to a connecting state just after the drawing-in action starts. Even if the A terminal is switched to the
15 connecting state instead of the B terminal, since the A terminal is connected to the ground, current i_2 from the power source V2 is continuously supplied so that the drawing-in action is continued.

[0054]

Thus, when the drawing-in action is continued and the striker
20 ST reaches a position constituting the drawn-in state (a drawing-in termination position), the push button 38a of the drawing-in switch 38 protrudes into the drawing-in termination detecting groove 36bb, and the C terminal is switched to a connecting state instead of the D terminal in the drawing-in switch 38. Thereby, since current flow to the
25 driving motors 32u and 32b are broken so that supply of the current i_2

from the power source V2 is stopped, the driving motors 32u and 32b are stopped, so that the drawing-in action is terminated in the drawn-in state of the striker ST, namely the closed state of the trunk lid. Since the worms 33u and 33b cannot be rotated by rotating the worm wheel
5 34, when the drawing-in action is terminated, the drawn-in state is held until a returning action starts.

[0055]

An action from the drawn-in state of the striker ST, namely, the closed state of the trunk lid to opening the trunk lid will be explained
10 next. In the closed state of the trunk lid, a door opening request operation, for example, a door opening request operation for operating a door opening request key provided on a remote control key is performed from a driving unit.

[0056]

15 When the door opening request operation is performed, a handle switch (not shown) is turned ON so that a door opening signal is acquired by the relay controller 111. The relay controller 111 that has acquired the door opening signal controls the relay R1 and the relay R2 so as to meet the returning action condition, specifically, the condition
20 for the connecting state of the plus terminal in the relay R1 and the connecting state of the minus terminal in the relay R2.

[0057]

When the relay R1 and the relay R2 are controlled so as to meet the returning action condition, a voltage of the power source V1 is
25 applied between the A terminal of the returning switch 37 and the D

terminal of the drawing-in switch 38. At this time, in the returning switch 37, the A terminal is switched to the connected state because the push button 37a has pushed in by the target disc 36b, while the C terminal is switched to the connected state in the drawing-in switch 38 because the push button 38a has protruded into the drawing-in terminal detecting groove 36bb. Thereby, the driving motors 32u and 32b and the power source V1 are connected to each other, current i1 from the power source V1 is supplied to the driving motors 32u and 32b via the returning switch 37. Thereby, the driving motors 32u and 32b are rotated in a direction reverse to that in the drawing-in action to generate powers. After the powers generated by the driving motors 32u and 32b are transmitted to the worm wheel 34 through the worms 33u and 33b to be further transmitted sequentially by the rear stage gears in a similar manner to the drawing-in action time, the rotary plate 22 is rotated through the driven gear 22b in a clockwise direction in Fig. 1. Thereby, in Fig. 1, the striker holding plate 23 is rotated in a clockwise direction integrally with the rotary plate 22, the striker ST is pushed up (the returning action).

[0058]

Just after the returning action starts, the push button 38a protruding toward the drawing-in termination detecting groove 36bb (exemplified in Fig. 5(a)) is pushed in by the target disc 36b according to rotation of the target disc 36b in a counterclockwise direction due to the returning action. Thereby, in the drawing-in switch 38, instead of the C terminal, the D terminal is switched to a connecting state just

after the returning action starts. Even if the D terminal is switched to the connecting state instead of the C terminal, since the D terminal is connected to the ground, current i_1 from the power source V1 is continuously supplied so that the returning action is continued.

5 [0059]

On the other hand, just after the handle switch is turned ON, as shown in Fig. 3, an actuator (not shown) is actuated so that the output lever 15 is rotationally driven via the wire 16 in a counterclockwise direction and the hook portion 12b of the latch 12 reaches the retracted
10 state, while it is separating from the striker ST. When the hooking portion 12b and the striker ST are disengaged from each other in this manner, the trunk lid is pushed up due to a restoring force of the weather strip that has been elastically deformed between the trunk lid and the body of the vehicle so that the trunk lid is opened.

15 [0060]

When the returning action of the door closer 100 is continued and the striker ST reaches a position constituting the returned state (a returning termination position), the push button 37a of the returning switch 37 protrudes into the returning termination detecting groove
20 36ba, and the B terminal is switched to a connecting state instead of the A terminal in the returning switch 37. Thereby, since current flow to the driving motors 32u, 32b are broken so that supply of the current i_1 from the power source V1 is stopped, the driving motors 32u, 32b are stopped, so that the returning action is terminated in the returned state
25 of the striker ST. Since the worms 33u, 33b cannot be rotated by

rotating the worm wheel 34, when the returning action is terminated, the returned state of the striker ST is held until a drawing-in action starts.

[0061]

In the closer driving unit (the driving apparatus) 30 in the
5 embodiment described above, powers generated by two driving motors
32u, 32b are transmitted to the worm wheel (the driven gear) 34
through two worms (driving gears) 33u, 33b provided on the driving
motors 32u, 32b. In this embodiment, therefore, since driving motors
generating power half of power generated by one driving motor can be
10 applied as the two driving motors 32u, 32b, powers individually
transmitted to the worm wheel (the driven gear) 34 via the worms 33u,
33b become small. Therefore, according to the closer driving unit 30
according to the embodiment, since the worm wheel 34 is suppressed
from increase in size and strength of the worm wheel 34 to powers
15 transmitted from the driving motors 32u, 32b can be secured,
downsizing is made possible. In this embodiment, of course, it
becomes possible to achieve downsizing of the door closer 100 to
which the closer driving unit 30 is applied.

[0062]

20 In the closer driving unit 30 according to the embodiment, as
compared with a case of using one driving motor, outside dimensions of
the driving motors 32u, 32b, for example, sizes of the driving motors, in
a diametrical direction thereof, relative to the motor shafts 32au, 32ab
can be reduced. Therefore, according to the closer driving unit 30
25 according to the embodiment, since the closer driving unit main unit 31

accommodating the driving motors 32u, 32b can be thinned, thinning of the closer driving unit can be achieved.

[0063]

In this embodiment, the returning switch 37 for performing
5 switching between current flow to the driving motors 32u, 32b and non-current flow thereto is provided between the driving motors 32u, 32b, and the power source V1, and current flow to the driving motors 32u and 32b are broken to stop operations of the driving motors 32u and 32b, when the striker ST reaches the returning termination position
10 during returning action. On the other hand, the drawing-in switch (the switching unit) 38 for switching current flow to the driving motors 32u and 32b and non-current flow thereto from one to the other is provided between the driving motors 32u, 32b, and the power source V2, and current flow to the driving motors 32u, 32b is broken to stop actions of
15 the driving motors 32u, 32b, when the striker ST has reached the drawing-in termination position during the drawing-in action. Thereby, it is unnecessary to transmit a signal for detecting that the striker ST has reached the returning termination position or the drawing-in termination position to the control base board 110 in the door closer
20 100 according to the embodiment. Accordingly, it is sufficient to provide two power cables 101, 102 and a cable for grounding, namely, three cables for controlling rotations of the driving motors 32u and 32b. Therefore, according to the door closer 100 according to the embodiment, since constitution with a reduced number of cables can be
25 made possible, time and labor reduction can be made possible for

cable handling works or cable connecting works.

[0064]

In the closer mechanism 20 according to the embodiment, the case that the rotary plate 22 and the striker holding plate 23 are
5 constituted as separate members is shown, but the rotary plate 22 and the striker holding plate 23 may be constituted integrally, of course.

[0065]

In this embodiment, the closer driving unit 30 for actuating the closer mechanism 20 of the door closer 100 is shown as the driving
10 apparatus, but the present invention is not limited to this illustration. For example, a driving apparatus constituted in a manner similar to the closer driving unit 30 can be applied as an assisting mechanism serving as an assistant for door opening operation, a driving apparatus of a so-called door opener, or it may be applied as assisting mechanism
15 serving as an assistant for door opening/closing operation, a driving apparatus of a so-called door opening/closing apparatus.

[0066]

[Effects due to the Invention]

As explained above, according to the driving apparatus
20 according to claim 1 of the present invention, since a plurality of driving sources, driving gears provided at individuals of the plurality of driving sources, and a driven gear engaged with the driving gears, respectively are provided, and the assisting mechanism is actuated according to rotation of the driven gear caused by driving of the plurality of driving
25 sources, powers transmitted to the driven gear through individual

driving gears from the respective driving sources can be made small.
Therefore, since the driven gear can be suppressed from increase in
size and the strength of the driven gear can be secured to powers
transmitted from the plurality of driving sources, downsizing of the
5 driving apparatus can be achieved.

[0067]

Further, according to the door closer according to claim 2 of the
present invention, since the closer driving unit has a plurality of driving
sources, driving gears provided at individuals of the plurality of driving
10 sources, and an driven gear engaged with the driving gears,
respectively, and the closer mechanism unit is actuated according to
rotation of the driven gear due to driving of the plurality of driving
sources, powers transmitted to the driven gear through individual
driving gears from the respective driving sources can be made small.
15 Therefore, since the driven gear can be suppressed from increase in
size and the strengths of the driven gear can be secured to powers
transmitted from the plurality of driving sources, downsizing of the door
closer can be achieved.

[0068]

20 According to the door closer according to claim 3 of the present
invention, in claim 2 described above, since a switching unit for
performing switching between current flow to a plurality of driving
sources and non-current flow thereto is provided between the plurality
of driving sources and a power source that supplies current to the
25 plurality of driving sources to actuate the plurality of driving sources,

and the switching unit stops the plurality of driving sources by breaking current flow to the plurality of driving sources when the striker drawn in through rotation of the driven gear reaches a predetermined drawing-in termination position, the plurality of driving sources can be stopped
5 without transmitting a signal that detects that the striker reaching the predetermined drawing-in termination position to an external controller. Accordingly, since a cable for transmitting the signal that detects that the striker reaching the predetermined drawing-in termination position to an external controller is not required, it is made possible to suppress
10 the number of cables to constitute the door closer and it is made possible to reduce time and labor in cable handling work and cable connecting work.

[Brief Description of the Drawings]

[Fig. 1] An appearance view of a door closer according to an
15 embodiment.

[Fig. 2] A first front sectional view of a trunk latch paired with the door closer shown in Fig. 1.

[Fig. 3] A second front sectional view of the trunk latch paired with the door closer shown in Fig. 1.

20 [Fig. 4] A front sectional view of a closer driving unit in the door closer shown in Fig. 1.

[Fig. 5] A depiction of a relationship between a target disc, a returning switch, and a drawing-in switch in the closer driving unit shown in Fig. 4: (a) is an explanatory view of a relationship
25 therebetween in a drawn-in state; and (b) is an explanatory view of a

relationship therebetween in a returned state.

[Fig. 6] A circuit diagram of a connecting circuit of two driving motors, the returning switch and the drawing-in switch, and a control base board in the closer driving unit shown in Fig. 4.

5 [Fig. 7] A table of a relationship between an action mode in the door closer shown in Fig. 1 and a connecting state in the returning switch and the drawing-in switch.

[Fig. 8] A timing chart of a relationship between the action mode in the door closer shown in Fig. 1 and the connecting state in the
10 returning switch and the drawing-in switch.

[Description of Signs]

- | | |
|-----|--------------------------------|
| 10 | trunk latch |
| 11 | trunk latch main unit |
| 11a | striker guiding groove |
| 15 | 12 latch |
| | 12a shaft member |
| | 12b hook portion |
| | 12c latch contacting portion |
| | 12d output unit |
| 20 | 13 ratchet |
| | 13a shaft member |
| | 13b ratchet contacting portion |
| | 13c input unit |
| | 14 latch spring 14 |
| 25 | 15 output lever |

	15a	shaft member
	15b	output unit
	16	wire
	17	latch switch
5	17a	push button
	17b	hinge lever portion
	17c	output cable
	20	closer mechanism
	21	housing
10	22	rotary plate
	22a	shaft member
	22b	driven gear
	22c	pin groove
	22d	fixed pin
15	22e	moveable pin
	22f	pin restraining spring
	23	striker retaining plate
	23a	opening
	23aa	main engaging recess
20	23ab	sub-engaging recess
	30	closer driving unit
	31	closer driving unit main unit
	32u, 32b	driving motors
	33u, 33b	worms
25	34	worm wheel

	34a	driving gear
	35	idle gear
	35a	driving gear
	36	output gear
5	36a	driving gear
	36b	target disc
	36ba	returning termination detecting groove
	36bb	drawing-in termination detecting groove
	37	drawing-in switch
10	37a	push button
	38	returning switch
	38a	push button
	100	door closer
	101, 102	power cable
15	110	control base board
	111	relay controller
	R1, R2	relay
	ST	striker
	STa	circular plate
20	V1, V2	power source


[Type of Document] Abstract

[Abstract]

[Object] To provide a driving apparatus and a door closer according to the present invention that are suitable for downsizing

5 [Means] In a door closer 100 that includes a striker ST provided on a body of a vehicle so as to be engageable with a latch 12 provided on a trunk lid, a closer mechanism 20 that pulls in the striker ST put in engagement with the latch 12 to close the trunk lid, and a closer driving unit 30 that actuates the closer mechanism 20, the closer driving unit 30
10 includes two driving motors 32u, 32b, two worms 33u, 33b provided on the driving motors 32u, 32b, and a worm wheel 34 engaged with the worms 33u, 33b, and the closer mechanism 20 is actuated through rotation of the worm wheel 34 caused by driving of the driving motors 32u, 32b.

15 [Selected Figure] FIG. 4

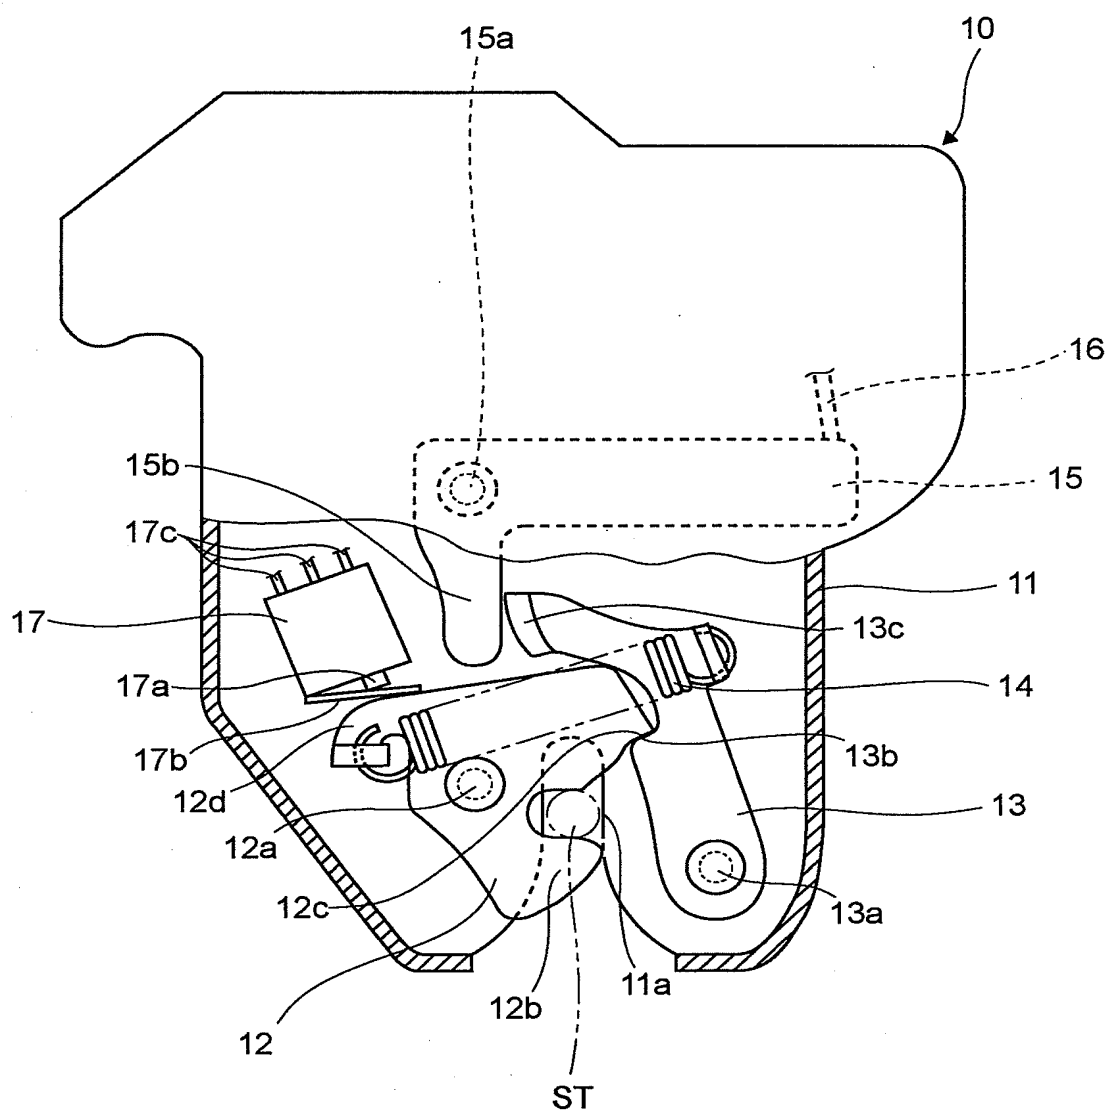

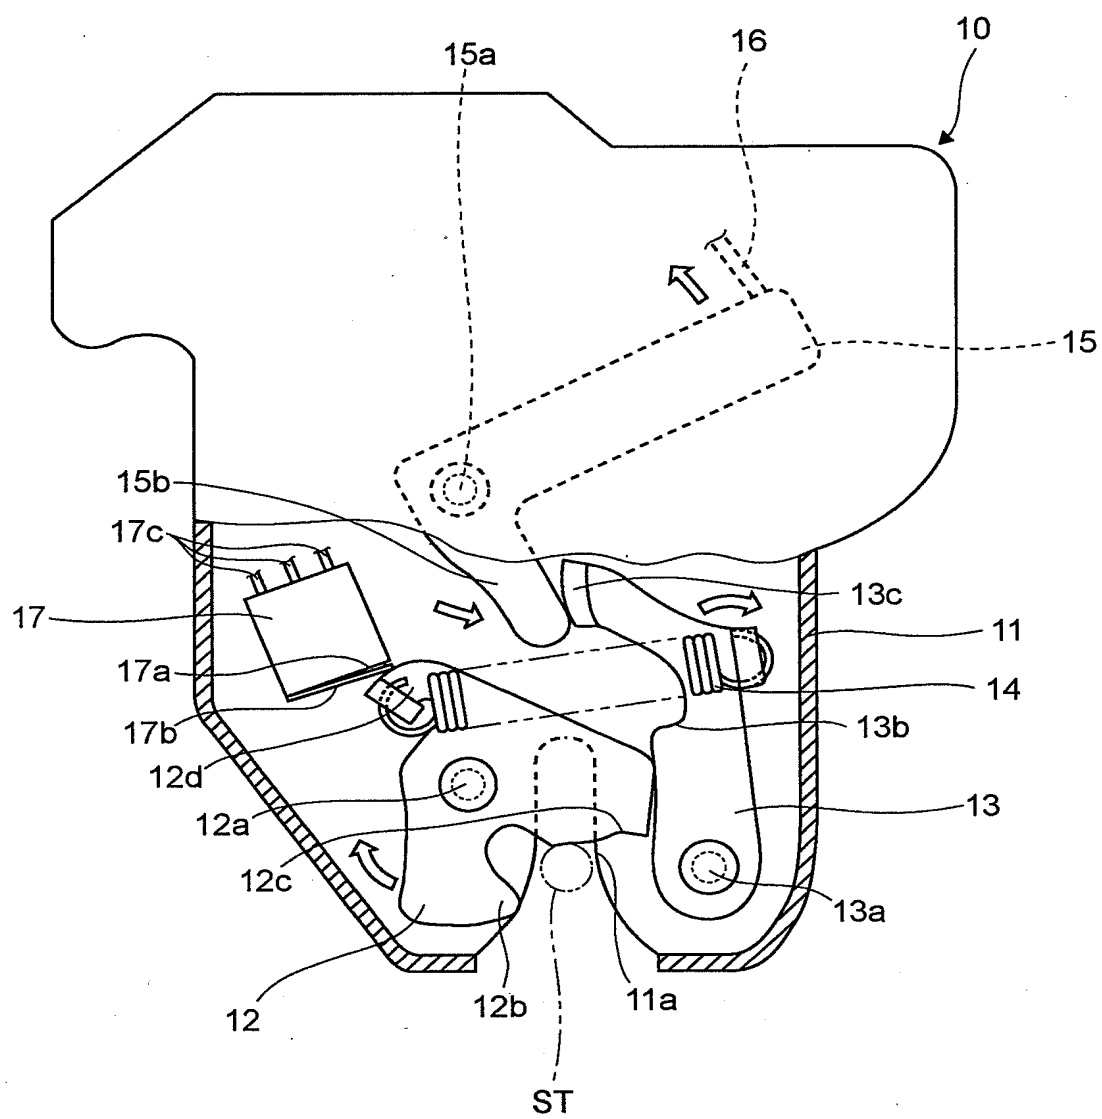


FIG.4


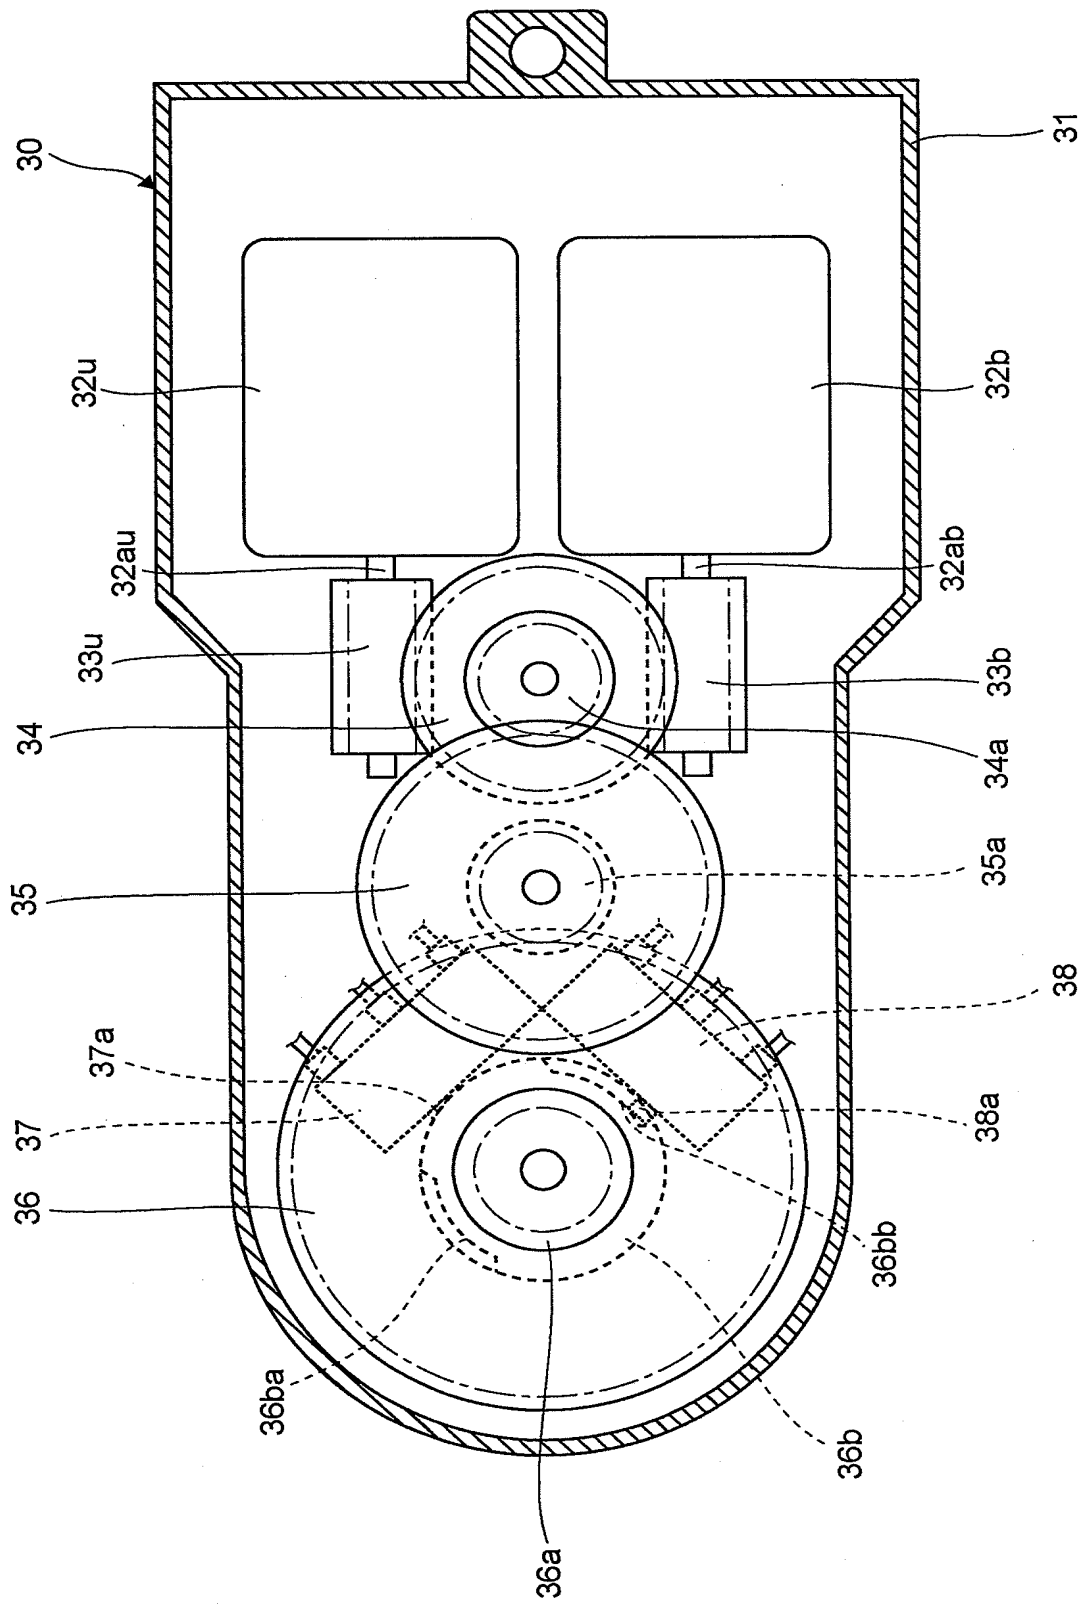



FIG.5

(a)

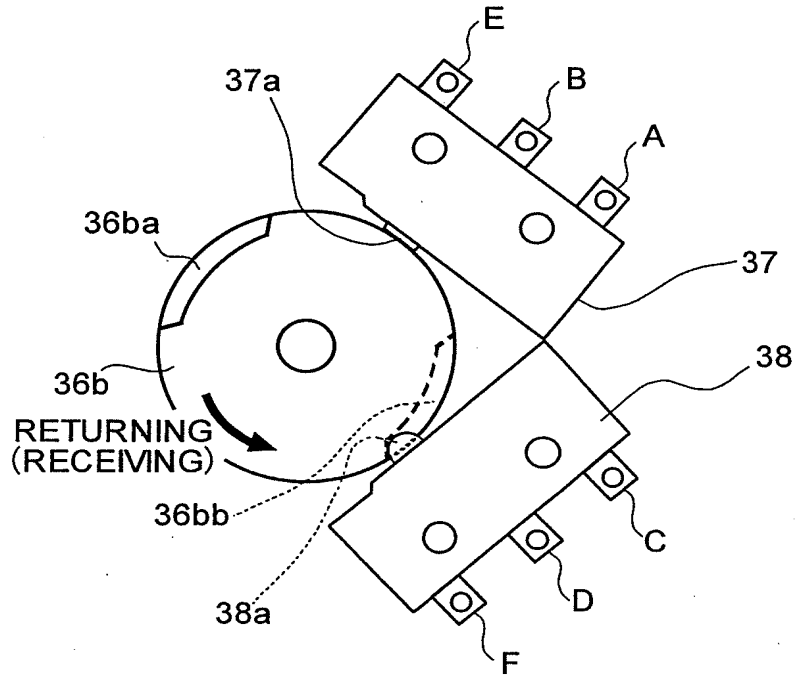

DRAWN-IN STATE
(A START TIME OF RETURNING ACTION)

(b)

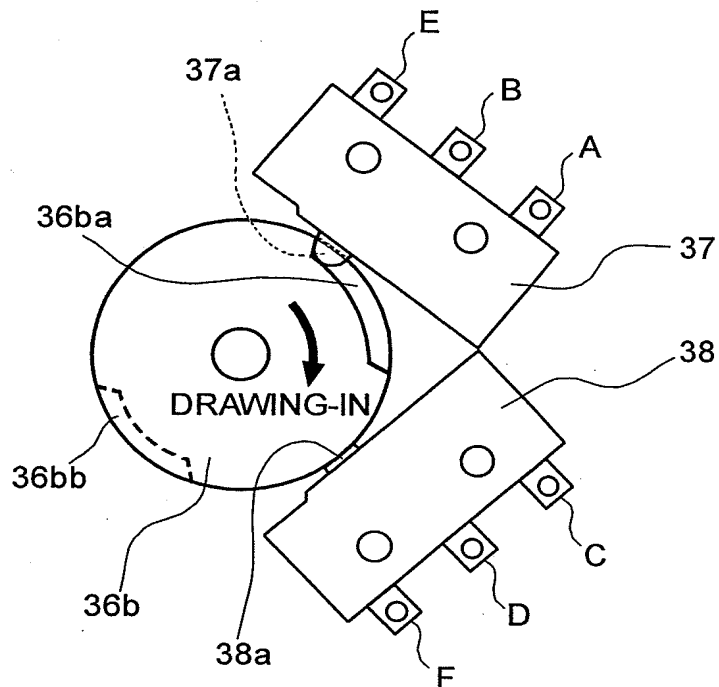

RETURNED (RECEIVED) STATE
(A START TIME OF DRAWING-IN ACTION)

FIG.6

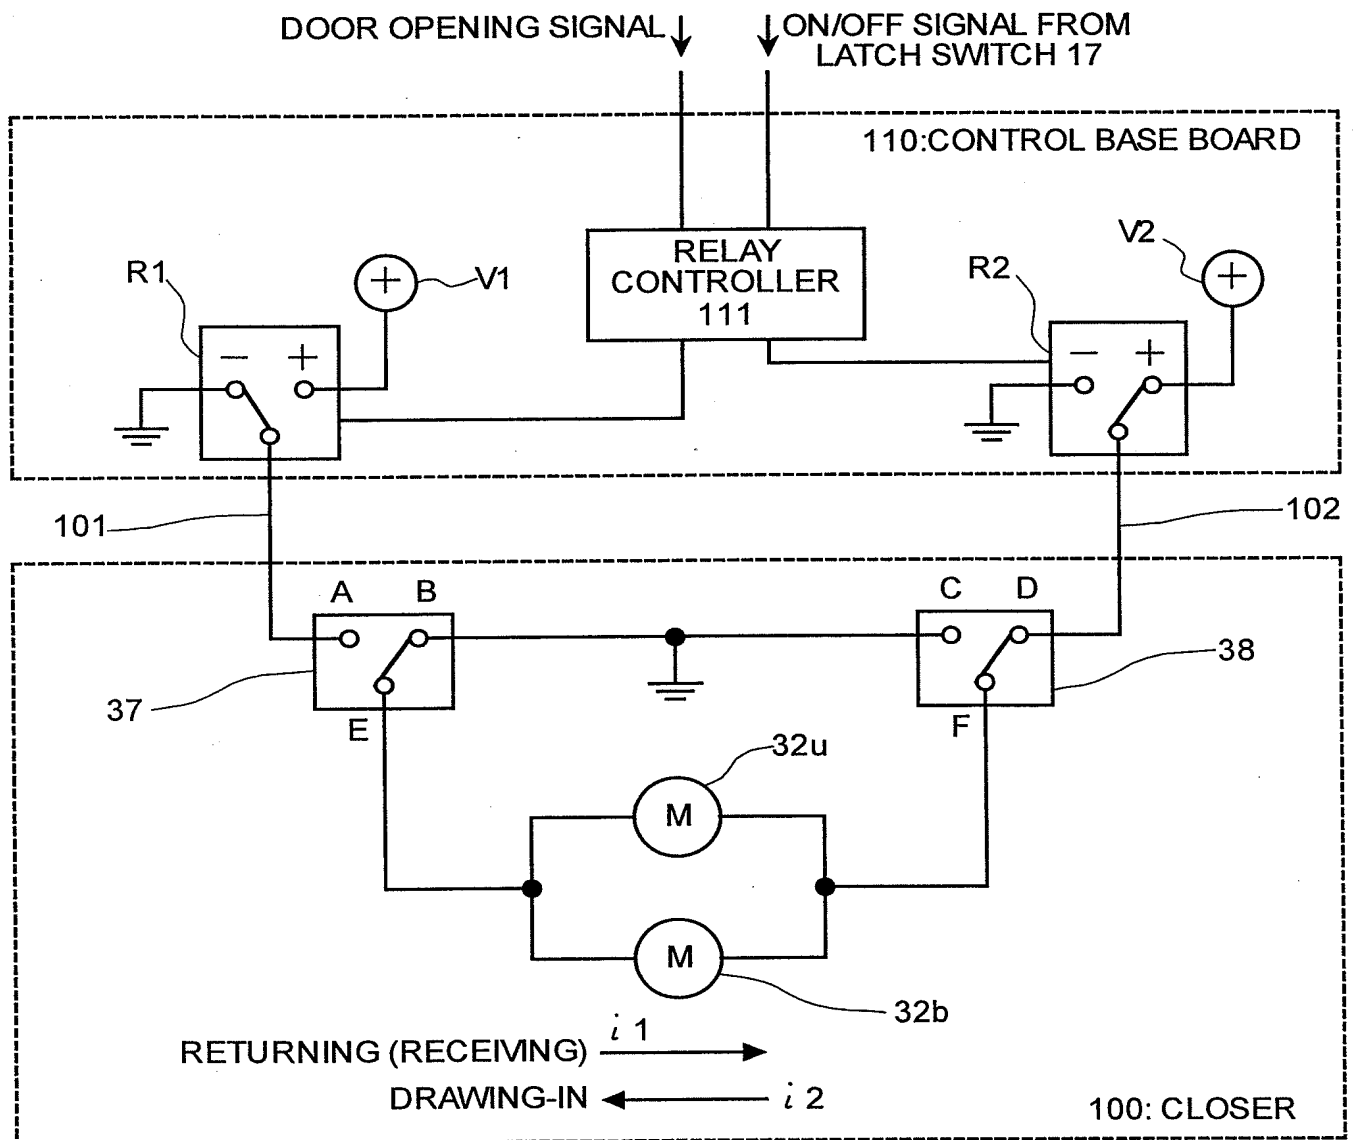


FIG.7

MODE	RETURNING SWITCH 37	DRAWING-IN SWITCH 38	RELAY R1	RELAY R2
DRAWN-IN STATE	A	C	—	—
RETURNING ACTION	SWITCHING A → B AT TIME OF COMPLETION OF RETURNING ACTION	SWITCHING C → D JUST AFTER RETURNING ACTION STARTS	+ (TIMER SETTING)	—
RETURNED STATE	B	D	—	—
DRAWING-IN ACTION	SWITCHING B → A JUST AFTER DRAWING-IN ACTION STARTS	SWITCHING D → C AT TIME OF COMPLETION OF DRAWING-IN ACTION	—	+ (TIMER SETTING)

FIG.8

